

Norcem MAN CCS reference

case **MAN Energy Solutions** Future in the making

MAN Energy Solutions is supplying the compressor system for the carbon capture and storage (CCS) system at the Norcem Brevik cement plant of Heidelberg Materials in Norway.

Heidelberg Materials will implement the world's first large-scale CO₂ capture plant for cement production. The plant at Brevik CCS will be finalized in 2024, with a capture capacity of 400,000 metric tons of CO₂ per year. This will account for

50% of the emissions from the cement plant in Brevik. This carbon will be captured using technologies from the cooperation partners Aker Carbon Capture and MAN Energy Solutions, then it will be liquefied and transported by ship to an underground storage site.

Key facts

- End customer: Heidelberg Materials (Norway)
- Scope of delivery: one electrically-driven RG 63-7 compressor train with integrated carbon capture heat recovery (CCHR®) technology
- Task: compress 0.4 Mt CO₂ per year and reduce energy consumption for steam generation by 30 %
- Function: compression of CO₂, liquification of CO₂, heat recovery within the process



MAN CCUS put into practice


First large-scale CO₂ capture plant in the cement industry

Hard-to-abate emissions are a central challenge in the race towards achieving net-zero goals. Industries such as concrete and cement production face significant hurdles in transitioning to more carbon-neutral practices, making the implementation of carbon capture, utilization, and storage (CCUS) an essential option. Given that the cement industry alone accounts for about 8% of global CO₂ emissions, it plays a crucial role in the pursuit of net-zero targets. Making CCUS an attractive solution for this industry is paramount to achieving rapid and widespread adoption.

MAN Energy Solutions, in collaboration with Aker Carbon Capture, has developed the CCHR[®] process. This innovative approach aims to reduce the energy requirements of installed CCUS plants, thereby enhancing their efficiency. Additionally, MAN Energy Solutions has devised methods to identify opportunities for reducing cold start times in cement plants through dynamic process simulations. These advancements hold the potential to streamline operations and minimize energy consumption during the whole process.

Reducing the CO₂ footprint using proven MAN technology

Heidelberg Materials recognized the urgent need to minimize its CO₂ emissions and contribute to mitigating climate change. By implementing a CCUS system, they aim to capture and store a significant portion of the CO₂ generated during cement production, effectively reducing their overall carbon footprint. By leveraging this proven technology, Heidelberg Materials can implement an effective solution. This reduces risks associated with untested technologies and ensures the viability and reliability of the system.

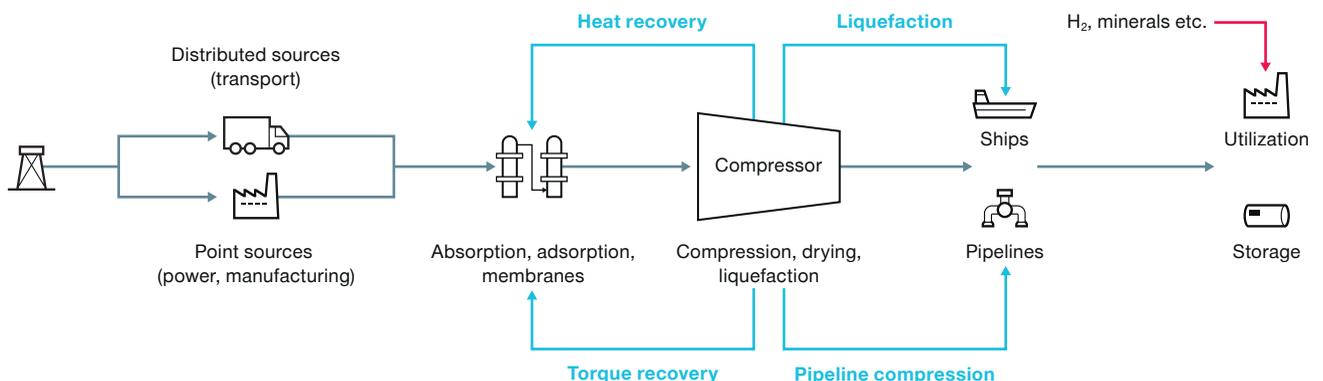

The carbon capture, utilization, and storage (CCUS) value chain

Increasing efficiency

Besides the use case shown in this paper, MAN Energy Solutions can utilize the heat from its compression process to enhance the efficiency of customer processes.

Industry leadership

Installing a CCUS system as an extension to a plant which is already in operation allows Heidelberg Materials to leverage existing infrastructure and optimize the integration process. This approach minimizes disruptions to ongoing operations and reduces costs associated with building a new facility from scratch. Heidelberg Materials

aims to be a front runner in the cement industry when it comes to adopting sustainable and environmentally friendly practices. By implementing a CCUS system, they demonstrate their commitment to reducing their environmental impact and leading the way in greening the cement sector.

Answers for a unique customer challenge

The quest to combat CO₂ emissions in cement production, presented unique challenges that demanded careful consideration and innovative solutions. Notably, the introduction of a CCUS plant or a chemical plant within an existing cement facility posed significant hurdles. The primary objective was to develop an energy-efficient CO₂ compression and liquefaction system, seamlessly integrated into a state-of-the-art CCUS infrastructure for optimal performance. To overcome these complexities, the project entailed extensive dynamic simulations and comprehensive studies.

The results are truly remarkable, including an impressive 30% reduction in the energy requirements for steam generation in the absorption process. The project presented another challenge for the team: the CO₂ that is available after the amine wash had such a high water content that no fluid mix properties or sophisticated calculation tools are available.

Intensive in-house research, calculation and programming led the MAN team to develop the skills to simulate the process and understand the changes in the fluid mix properties throughout the compression of the CO₂. This knowledge was used to determine the process performances and calculate the achievable savings. Moreover, the team demonstrated ingenuity by strategically designing and arranging various components, optimizing space utilization within the site's confined parameters.

MAN CCUS solution


MAN Energy Solutions is providing an electrically-driven compressor train, specifically the RG 63-7 model, equipped with integrated CCHR[®]. This innovative technology incorporates steam generators that cool the CO₂ mixture between the compressor stages, effectively harnessing the waste heat and generating steam. This steam is then utilized in the CO₂ capture process.

In the CCUS process, heat generated by the compression of CO₂ is utilized to generate steam. This steam is subsequently introduced to the desorber, effectively reducing the amount of additional steam required in the CO₂ capture process. By utilizing the waste heat from the CO₂ compression process to generate steam, the CCUS system achieves energy efficiency and reduces the demand for external steam generation.

This method of steam generation optimizes the utilization of resources and contributes to the overall energy efficiency of the CCUS plant.

The compressed CO₂ is subsequently liquefied using sea water, facilitating its transportation and storage for further utilization. The liquefied CO₂ will be shipped from Brevik to the sequestration site under the North Sea, which is specifically designated for the Northern Lights projects. At the sequestration site, the CO₂ will be permanently stored.

By integrating the RG compressor with the CCHR[®] technology, MAN Energy Solutions offers an efficient and sustainable solution for CO₂ capture and liquefaction, and so enables subsequent transport to the designated sequestration site. This comprehensive approach contributes to the overall goal of reducing CO₂ emissions and advancing towards carbon neutrality.

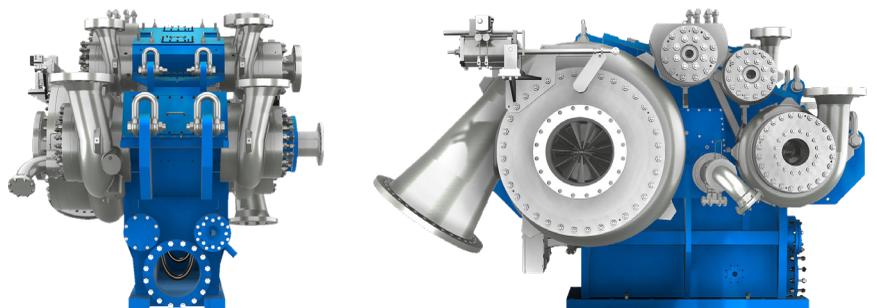

MAN RG compressor

MAN Energy Solutions

13507 Berlin, Germany
P + 49 30 440402-0
F + 49 30 440402-2000
turbomachinery@man-es.com
www.man-es.com

MAN Energy Solutions

46145 Oberhausen, Germany
P + 49 208 692-2348
F + 49 208 692-021
turbomachinery@man-es.com
www.man-es.com

All data provided in this document is non-binding. This data serves informational purposes only and is not guaranteed in any way. Depending on the subsequent specific individual projects, the relevant data may be subject to changes and will be assessed and determined individually for each project. This will depend on the particular characteristics of each individual project, especially specific site and operational conditions.

Copyright © MAN Energy Solutions.
D2366713 Printed in Germany
GKM-AUG-231105